

Improving the mechanical properties of thermally modified wood by a prior chemical treatment

Nadine Herold, Jana Peters, Mario Zauer, Steffen Fischer, Alexander Pfriem

Eberswalde University for Sustainable Development


University of Applied Sciences
Friedrich-Ebert-Straße 28
D-16225 Eberswalde

BACKGROUND AND OBJECTIVE


BACKGROUND

- Modification at temperatures in the range of **160 to 240° C** in **reduced oxygen atmosphere** provoke a permanent change in substantial wood properties over the whole profile
- Modification duration and temperature determine the degree of change

THERMAL MODIFICATION

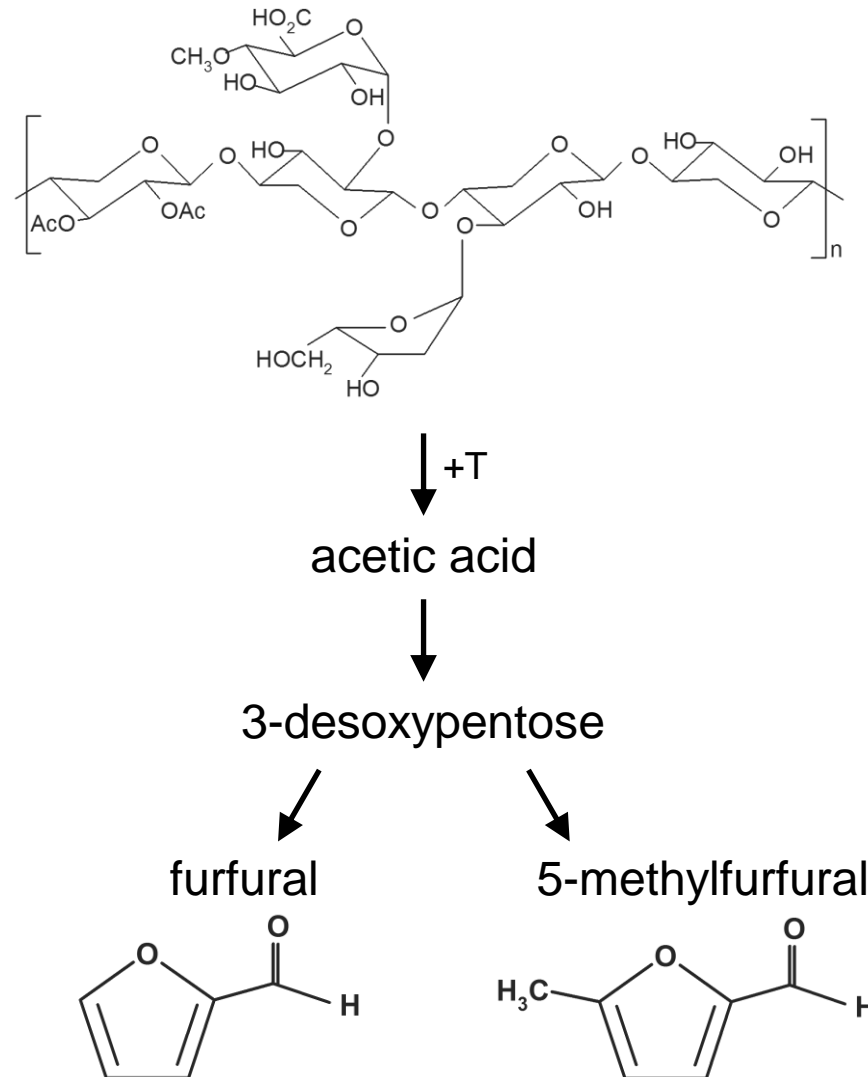

GC/MS ANALYSES OF EMISSIONS FROM SPRUCE BEFORE AND AFTER EXTRACTION

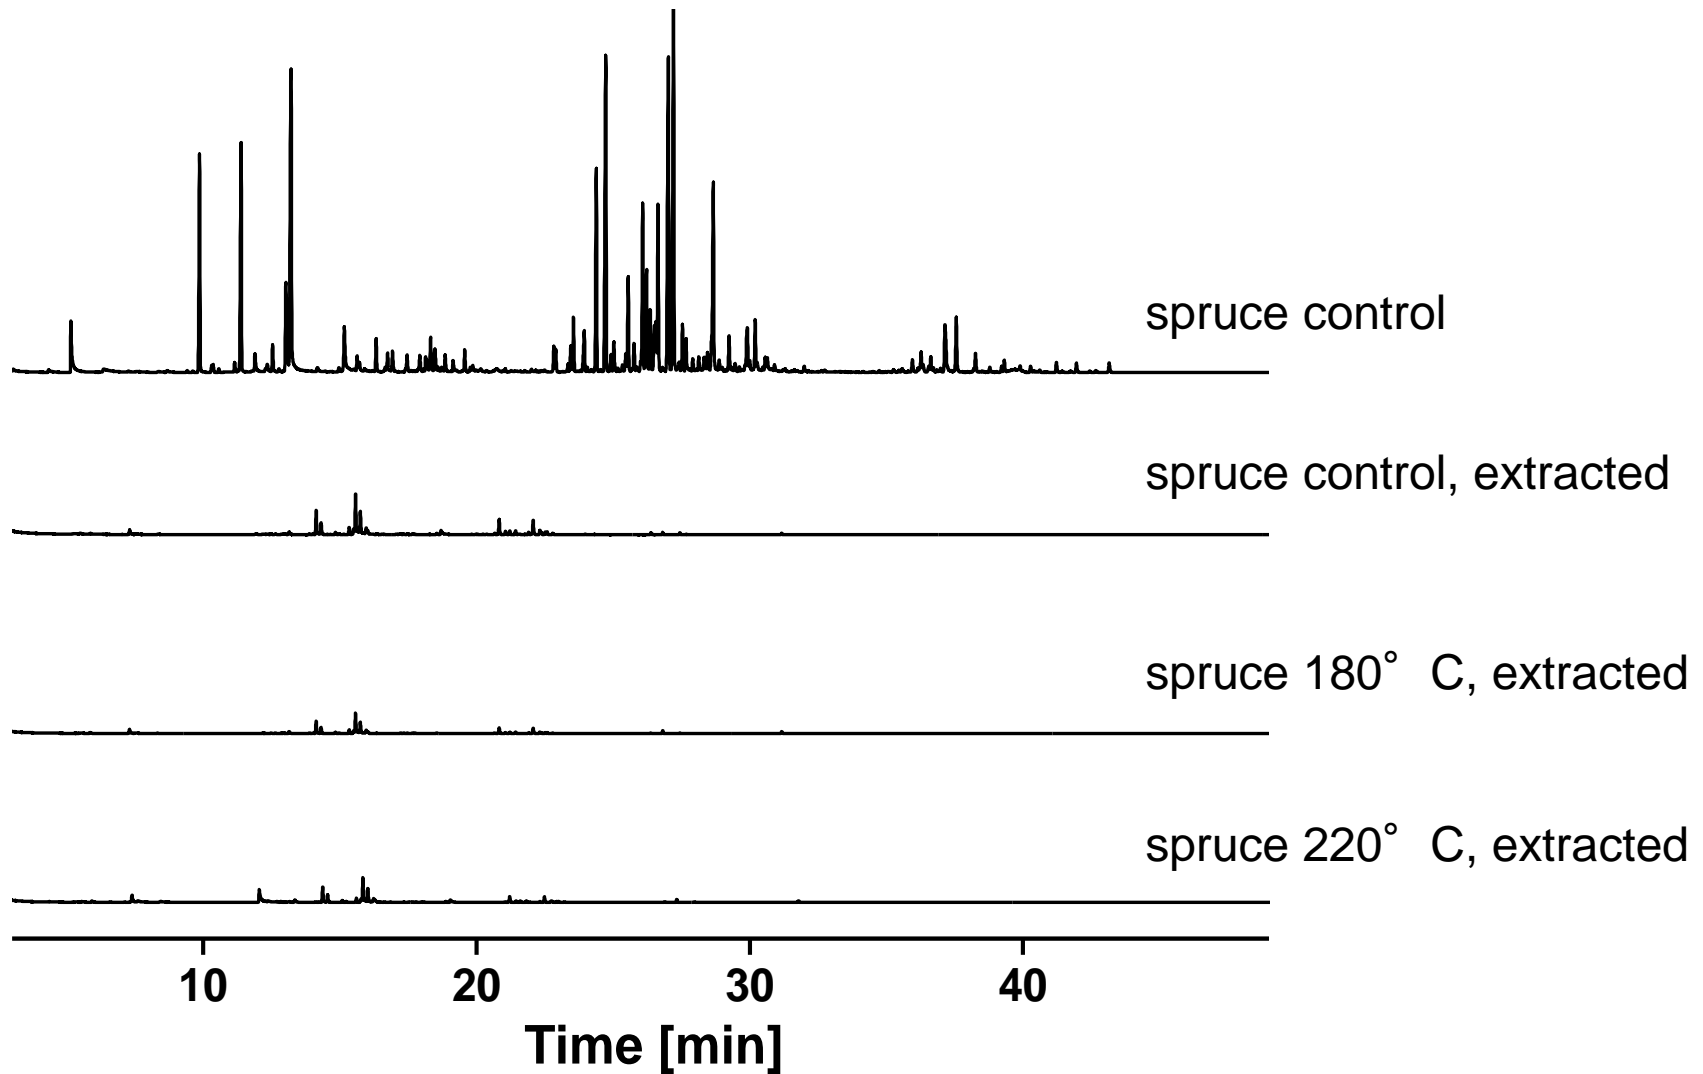

OBJECTIVE OF THIS PROJECT

Elimination of hazardous emissions of thermally modified wood by chemical impregnation prior to the thermal treatment with **improvement** of positive characteristics and **minimization** of negative impacts at the same time.


EXPERIMENTAL SET-UP

SAMPLES



- heartwood (*Acer spec.*)
- dimensions:
140 mm (longitudinal) * 10 mm (radial) * 10 mm (tangential)
- chemicals:
urea (1; 0.5; 0.25 M)

EXPERIMENTAL SET-UP




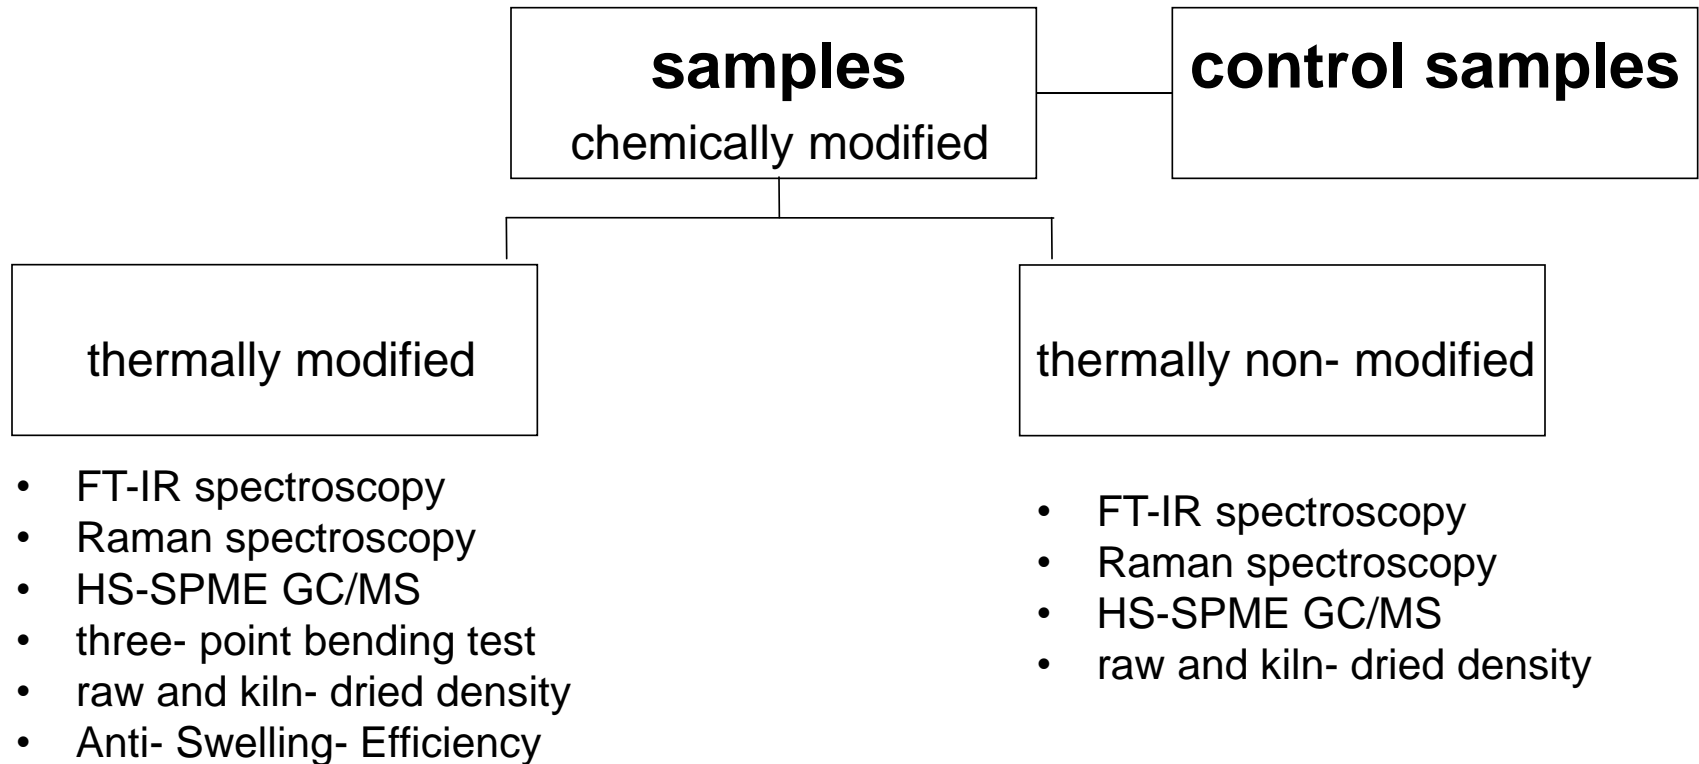


METHODS AND RESULTS




FT-IR- AND RAMAN-SPECTROSCOPY

- Raman- and FT-IR spectroscopy for complementary determination of changed vibrations in wood due to chemical and thermal modification

FT-IR-SPECTROSCOPY

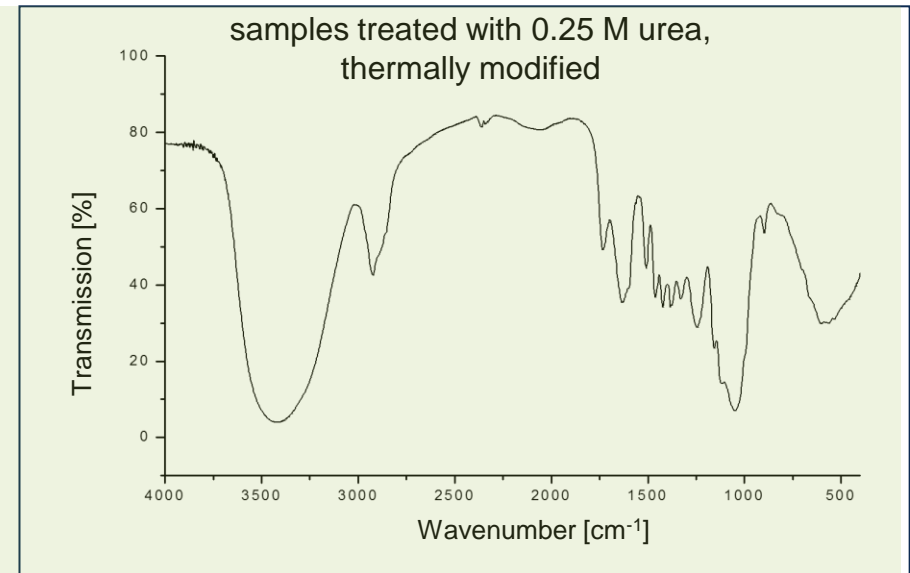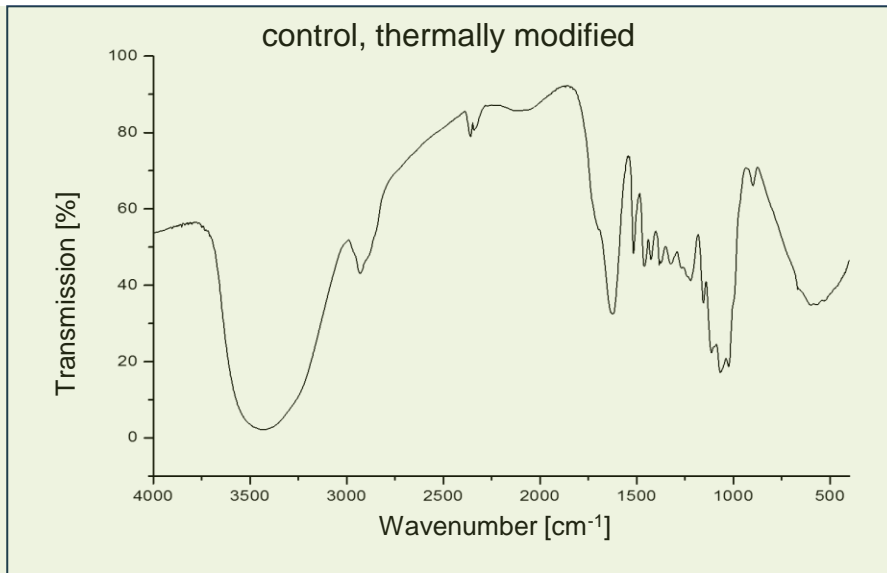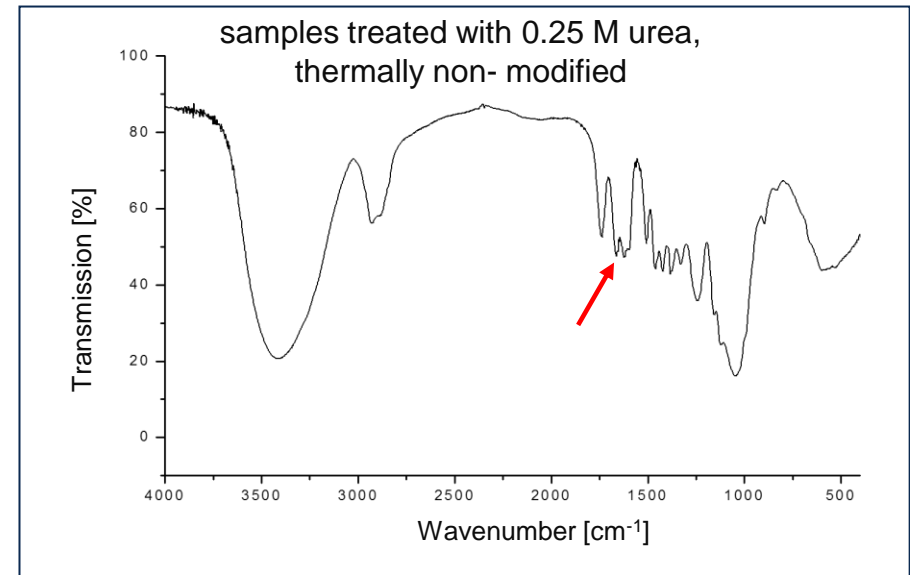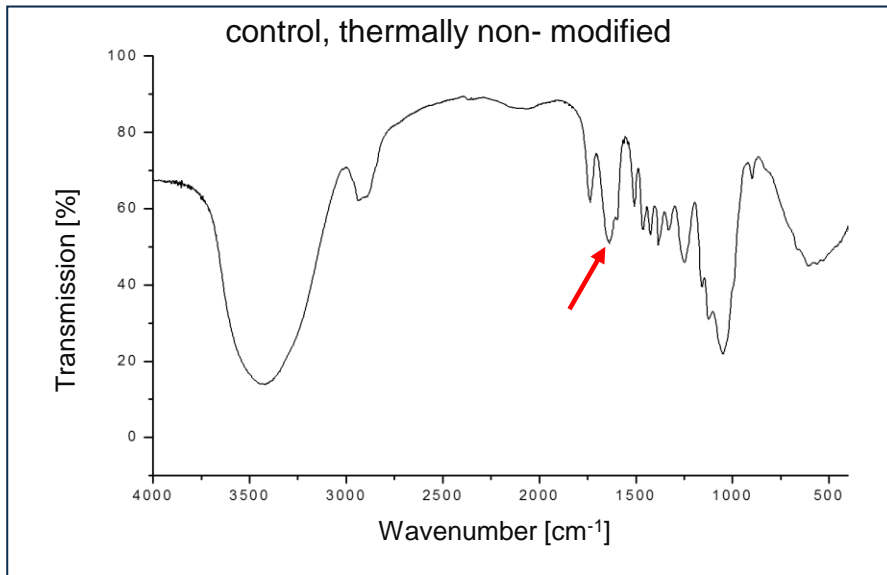


RAMAN- SPECTROSCOPY

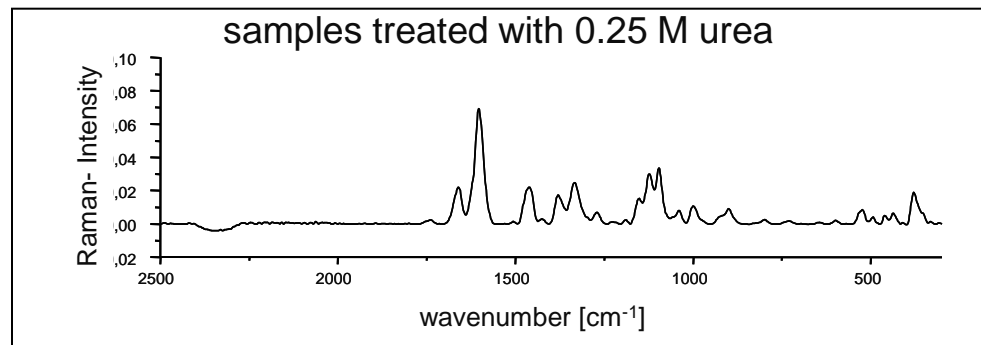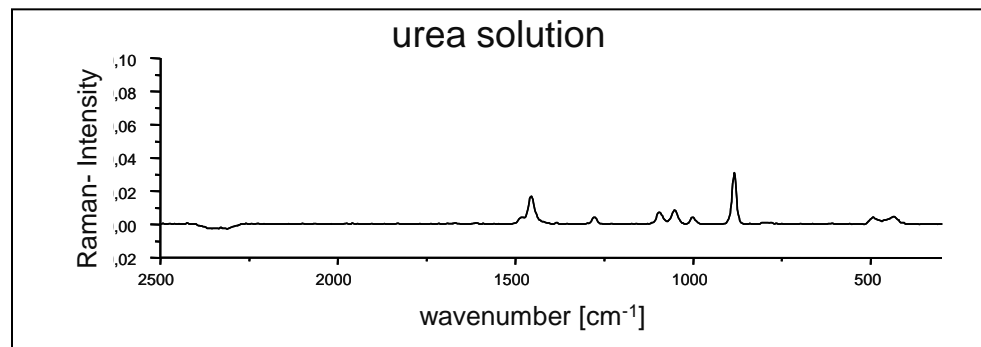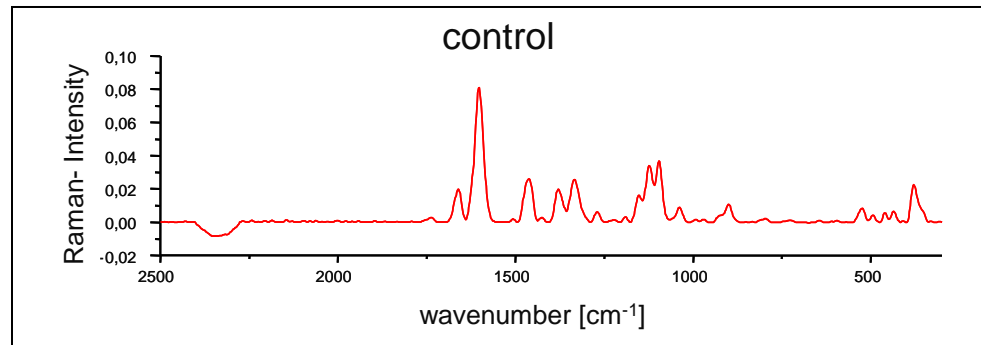

HS-SPME GC/MS (Headspace gas chromatography/ mass spectrometry, combined with solid-phase microextraction)


Isolation and characterisation of odorous and volatile emissions from chemically and thermally modified wood with GC/MS

- enrichment of volatiles by **solid-phase microextraction (SPME)**
- conditions for enrichment:
elevated temperature (70° C) over a defined period (1h)
- analysis by GC/MS:
identification of substances by analysis of individual mass spectra and comparison with library or reference substances

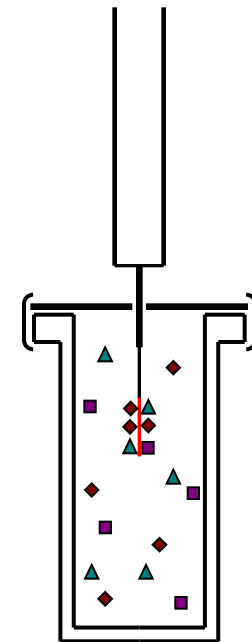


Sampling with SPME

SPME-GC/MS


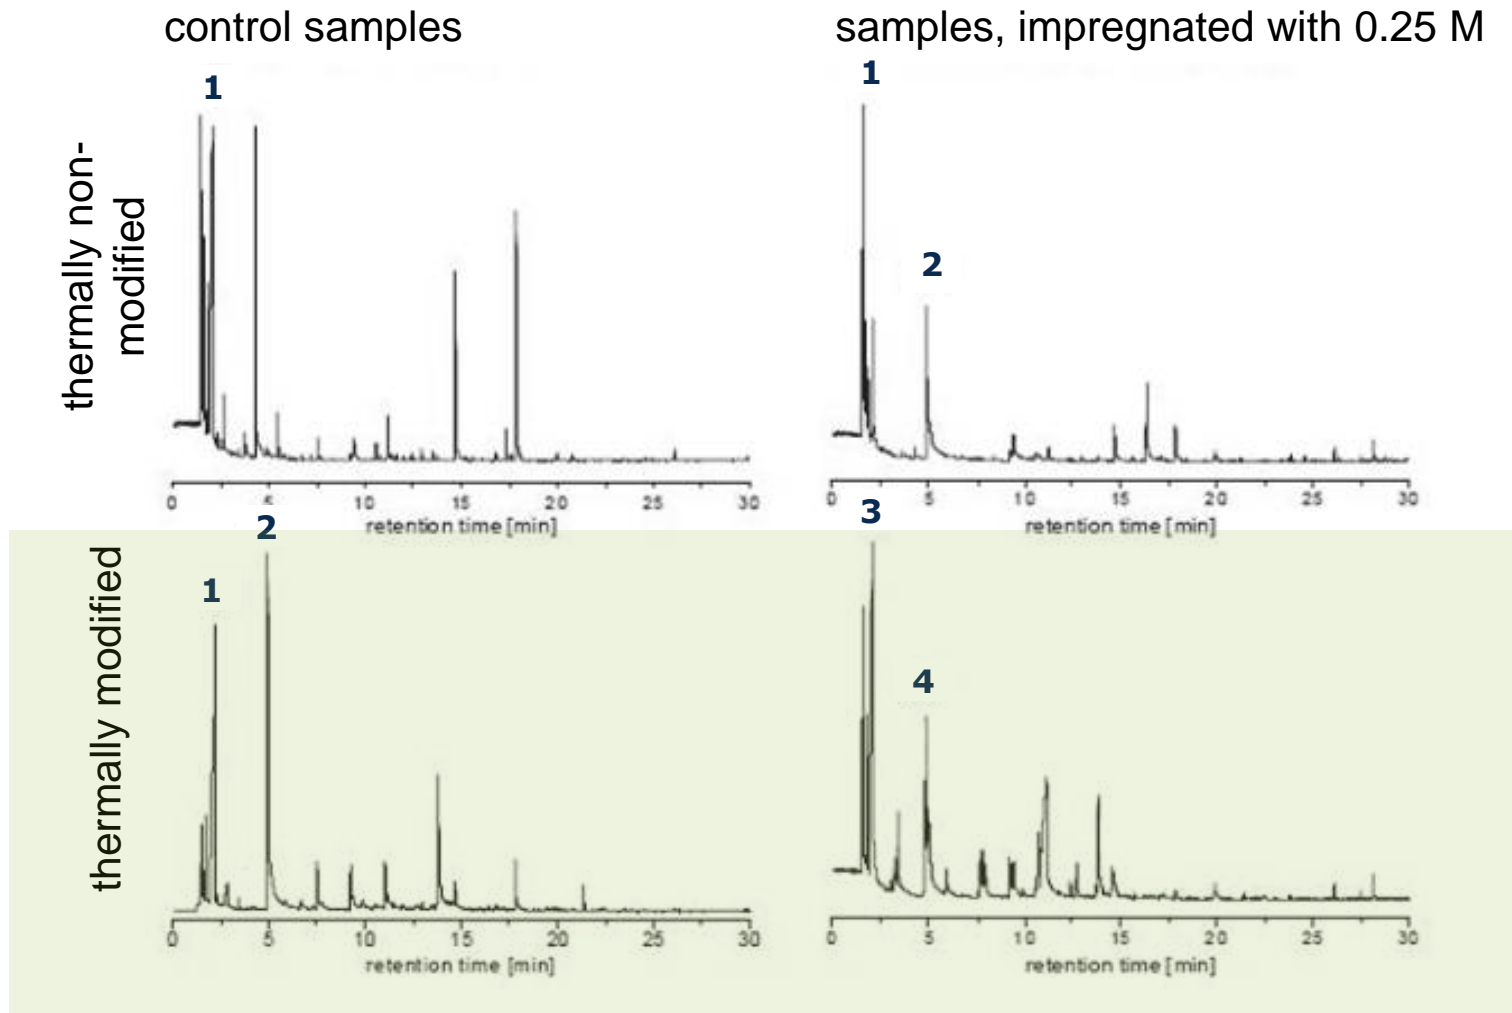


1: acetic acid, 2: furfural, 3: ethyl acetate, 4: urethane



SPME-GC/MS

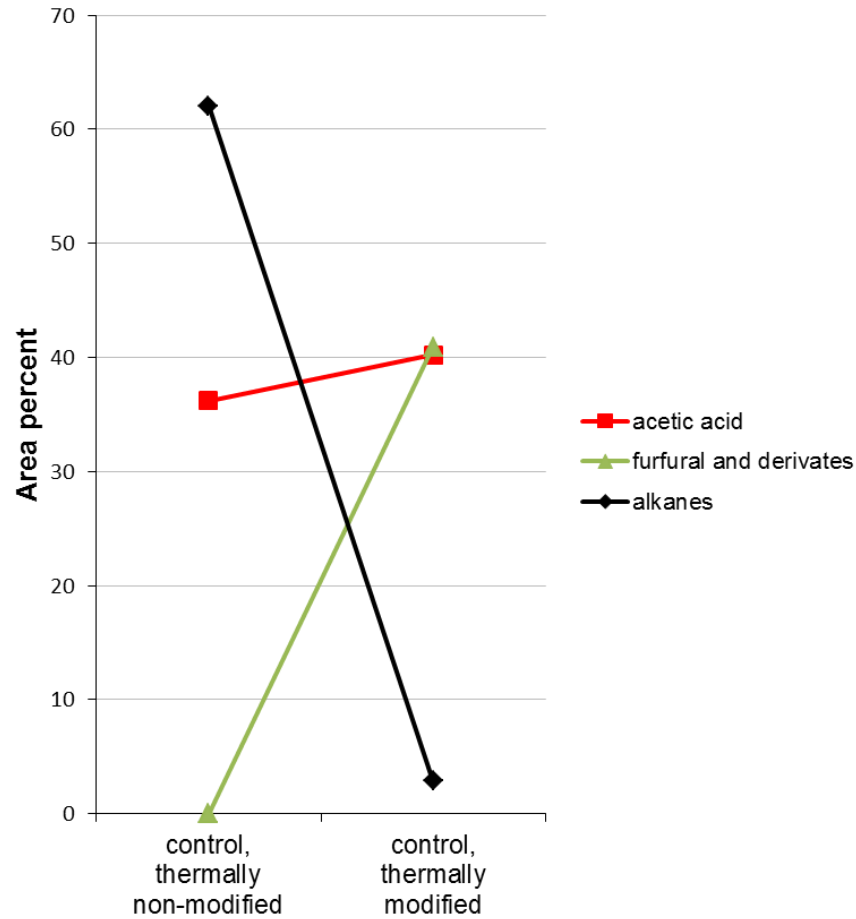

SPME-GC/MS

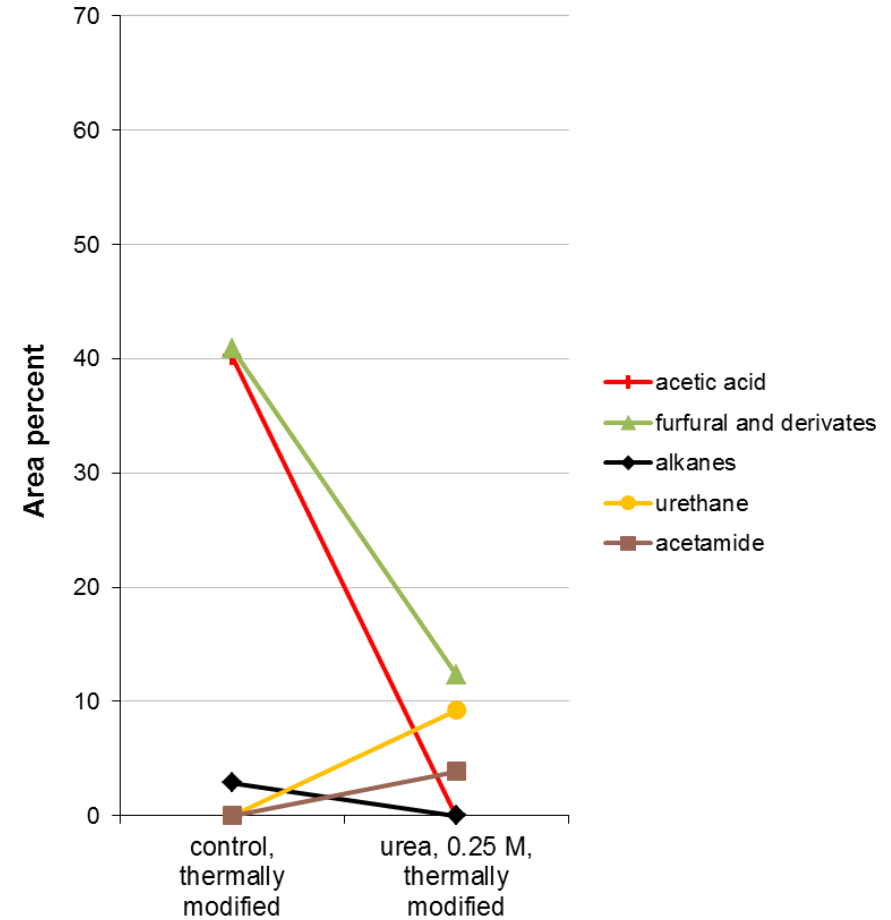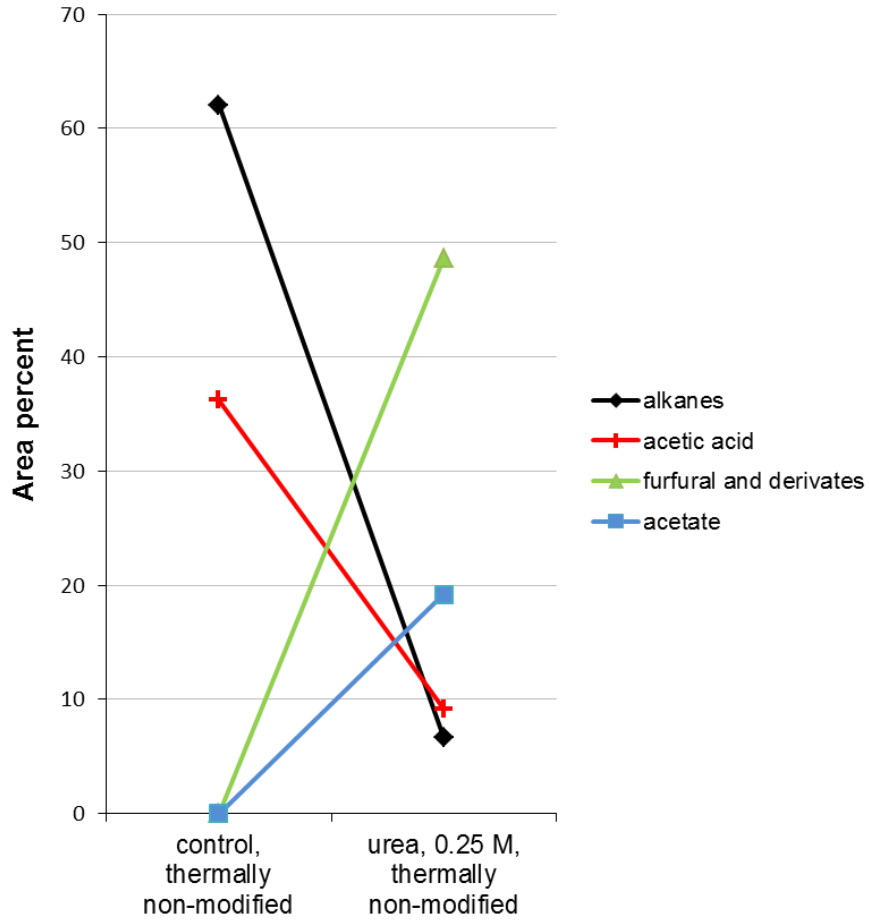

SPME-GC/MS

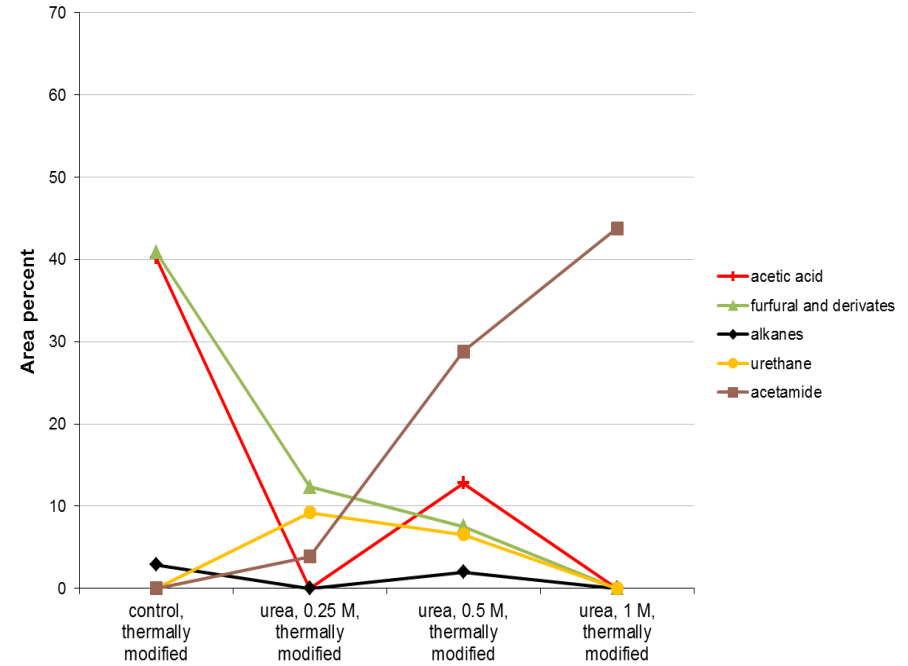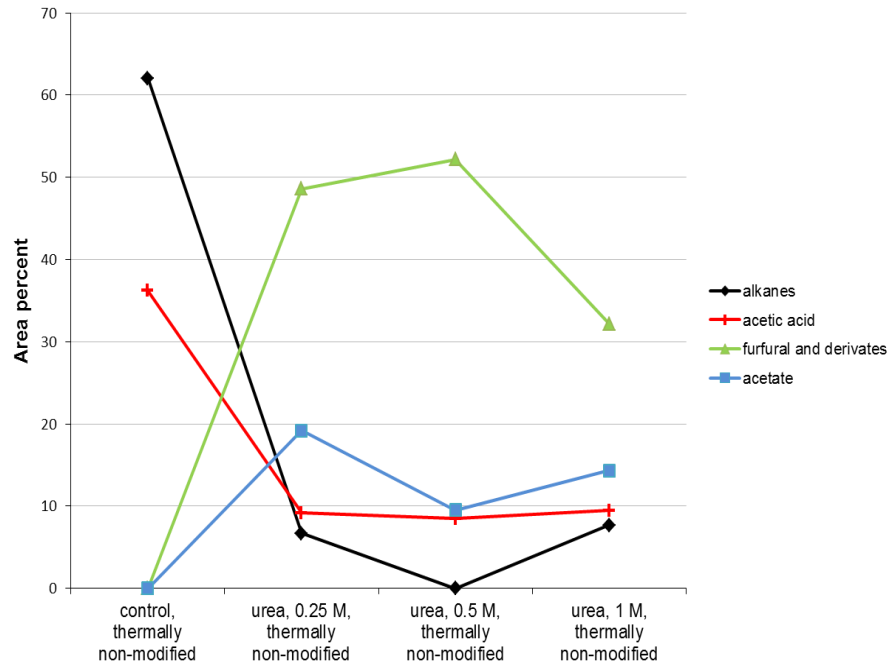


FLEXURAL MODULUS OF ELASTICITY

Characterization of changes in strength properties due to chemical impregnation and thermal modification


- three- point bending test according to DIN 52186
- samples are conditioned under standard atmosphere
- annual rings are arranged vertically towards application of force

→ *flexural modulus of elasticity* f_m [N/mm²]

FLEXURAL MODULUS OF ELASTICITY

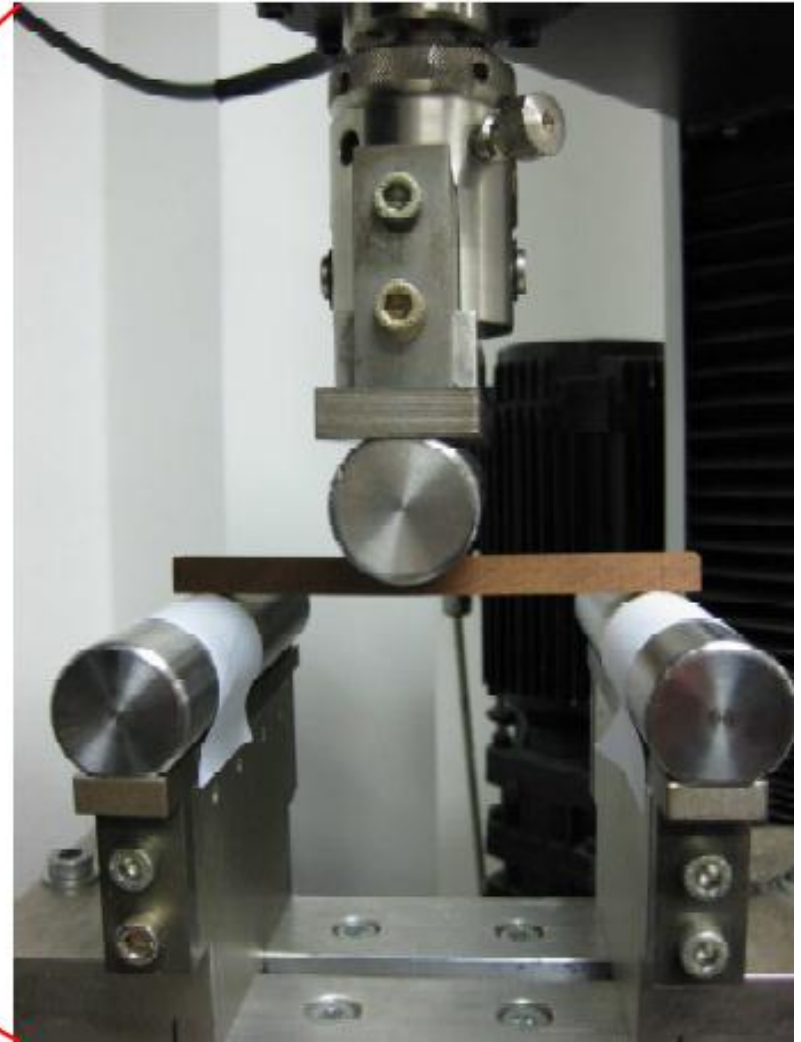

FLEXURAL MODULUS OF ELASTICITY

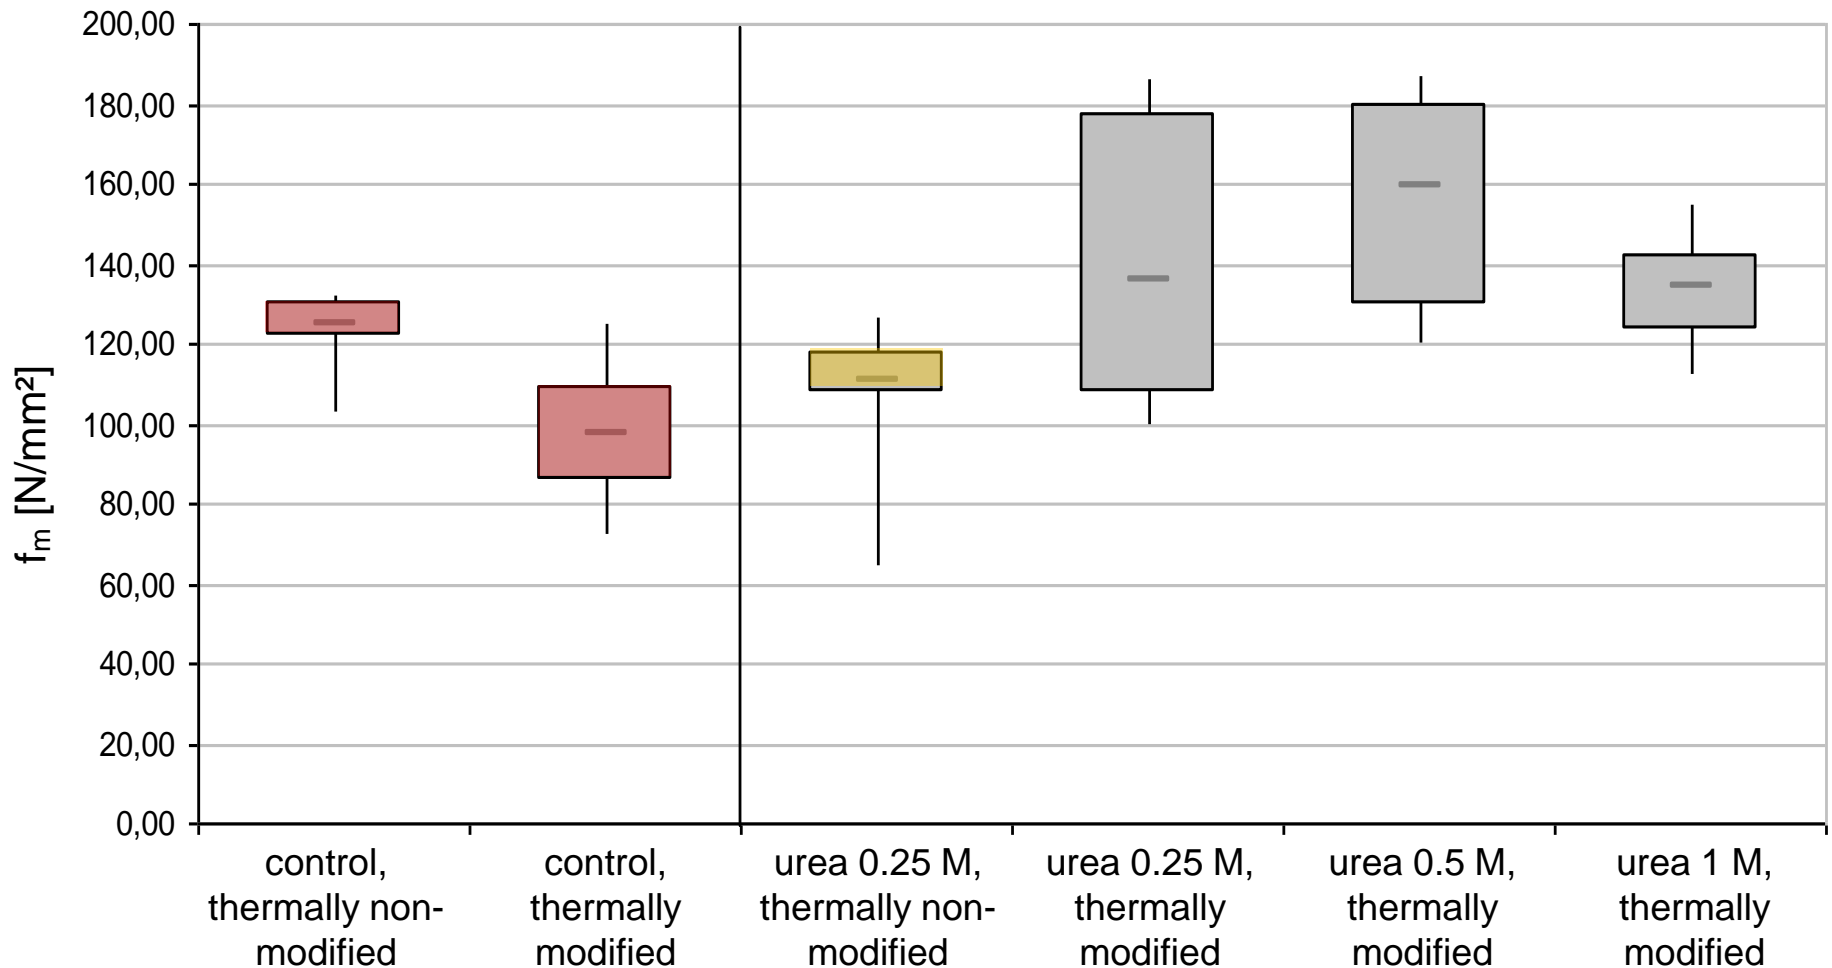

DIMENSIONAL STABILITY


Determination of changes in dimensional stability due to chemical and thermal modification

$$ASE\% = [(S_u - S) / S_u] * 100 (\%)$$

S – change of volume; chemically and thermally modified

S_u – change of volume; reference, thermally non- modified

DIMENSIONAL STABILITY

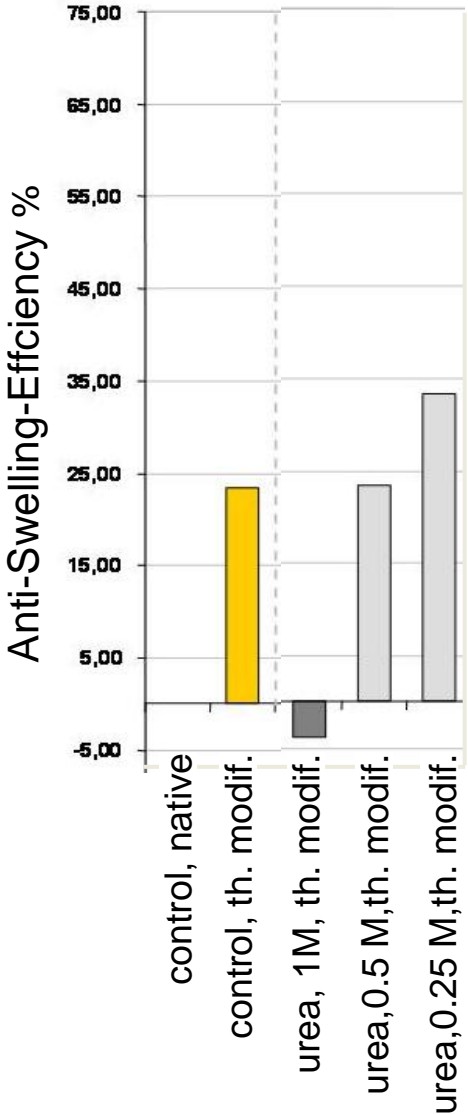

CONCLUSION

CONCLUSION

- Best sensoric effects have been obtained by impregnating samples with a **0.25 M urea** solution.
- Changes in chemical structure due to the impregnation with urea could be verified by SPME-GC/MS, FT-IR-, and Raman- spectroscopy.
- Raman- spectroscopy has not been successfully conducted on thermally modified samples; absorbance has been too strong.
- The application of a **0.25 M urea** solution prior to thermal modification results in an increased flexural modulus of elasticity and an improved dimensional stability.

Thank you for your attention!

This publication is based on results and tests, which have been financially supported by the German Research Foundation (FI 755/4-2).

